

## 6.420TDI engine

235.5 kW (320 hp) at 3600 rpm

### Toyota engine base

The design of the 6.420 TDI is based on the 6 cylinder diesel engine which is used and tested on the Land Cruiser 4x4. The robustness of its engine block and its cast iron cylinder head as well as the efficiency of the different heat exchangers that compose the marinization developed by Nanni Diesel give you the assurance of quality, reliability and longevity that have already convinced many renowned boat builders.

### Smooth and performing

The 6.420TDI boasts 6 in line cylinders, 4 valves per cylinder and 2 balancing shafts which result in unprecedented smoothness providing very quiet and virtually vibration-free comfort.

The 6.420TDI is perfectly suited for shaft line boats as a result of the combination of

its low rated speed of 3600 rpm, its 4.2 litres capacity and its high torque at low speed. The hole-shot of your boat is quicker and the obtained cruising speed at low rpm ensures low fuel consumption.

### Compact and powerful

The power to weight ratio of this 320 horsepower engine is one of its greatest advantages. Its reduced dimensions ease installation and have already made it a preferred option on numerous boats.

With this engine you can count on the most dynamic motorization with plenty of power reserve for all situations.

### Protecting the environment

The engine complies with the most stringent emission regulations in the world : EU-RCD, US-EPA and BSO.

### Main characteristics

- Toyota base engine
- Big displacement
- High torque
- Turbo compressor & Intercooler
- Direct fuel injection
- 4 valves per cylinder
- 2 balance shafts

### Available transmissions

- ZF63A (hydraulic) 8° angle
- ZF63 (hydraulic)
- ZF63IV (hydraulic) 12° angle
- ZF80A (hydraulic) 8° angle
- ZF220PL (hydraulic)
- TTM50A (hydraulic) 8° angle

### Applications

- Semi-planning hulls
- Planning hulls

### Technical specifications

|  |                                    |
|--|------------------------------------|
| Engine base                                      | Toyota                             |
| Rated power (kW/hp)*                             | 235.5 / 320                        |
| Rated rpm (rpm)*                                 | 3600                               |
| Displacement (cm <sup>3</sup> /in <sup>3</sup> ) | 4163 / 254                         |
| Number of cylinders                              | 6 in line                          |
| Bore and stroke (mm/in)                          | 94 x 100 / 3.7 x 3.93              |
| Compression ratio                                | 15.7:1                             |
| Combustion system                                | Direct                             |
| Intake   | Turbo compressor & Intercooler     |
| Cooling  | Closed cooling with heat exchanger |
| El. equipment / Alternator                       | 12V / 80A                          |
| Instrument panel                                 | C4-T                               |
| Transmission                                     | Hydraulic gearbox                  |
| Engine Max Install. Angle                        | 7° (dynamic)                       |
| Certifications                                   | EPA, BSO, EU-RCD                   |
| Dry weight with TTM40A (kg/lb)                   | 469 / 1034                         |
| <b>Connections diameter</b>                      |                                    |
| Exhaust (mm/in)                                  | 104 / 4.09                         |
| Fuel (mm/in)                                     | 10 / 0.39                          |
| Sea Water (mm/in)                                | 38 / 1.49                          |

\* At engine flywheel, according to ISO 8665-1

# 6.420TDI engine

235.5 kW (320 hp)

## Standard equipment






- Warranty certificate
- Exhaust manifold With water injection
- Exhaust elbow
- Closed cooling with heat exchanger
- Compressed air cooler
- 6 meters electrical harness
- Fuel filter with audio alarm (Water)
- Sea water filter on the engine
- Hydraulic transmission (8°)
- Owner's Manual
- Coolant circulating pump
- Rotary injection pump
- Oil extraction pump
- Sea water pump
- Prearrangement for control cables
- Integrated oil cooler
- Electrical stop
- Engine flexible mounts
- Electrical system 12 V
- Thermostat

## Optional equipment

- Separated instruments
- Electrical harness
- Flying bridge instrument panel
- V drive transmission
- Alternator 120A
- Remote control
- Exhaust system
- Sea water hoses
- Fuel hoses
- Sea water filter
- Flexible coupling

## C4-T panel

- Ignition key / Start button
- Tachometer and hour meter / Voltmeter
- Battery charge warning light
- Engine control warning light
- Turbo warning light
- Preheating warning light
- Water in fuel filter warning light
- Oil pressure indicator
- Oil pressure warning light
- Coolant temperature indicator
- Preheating warning light

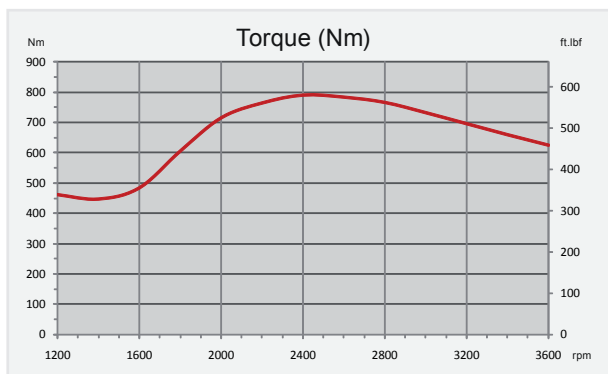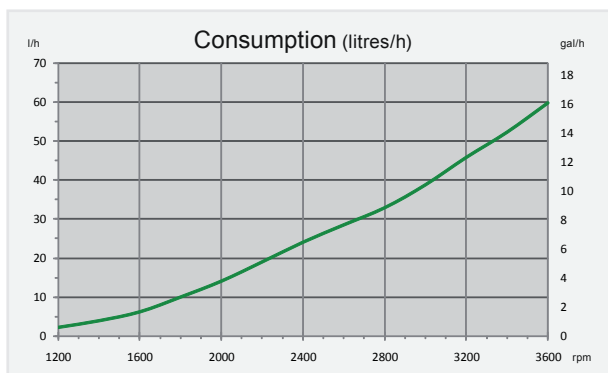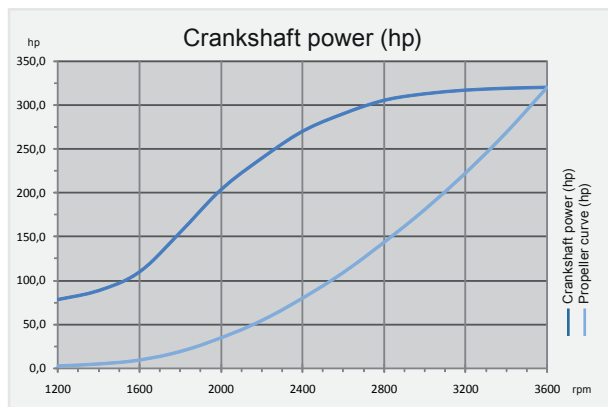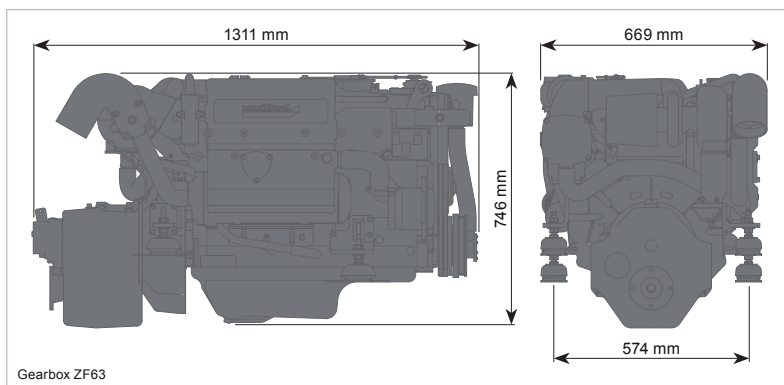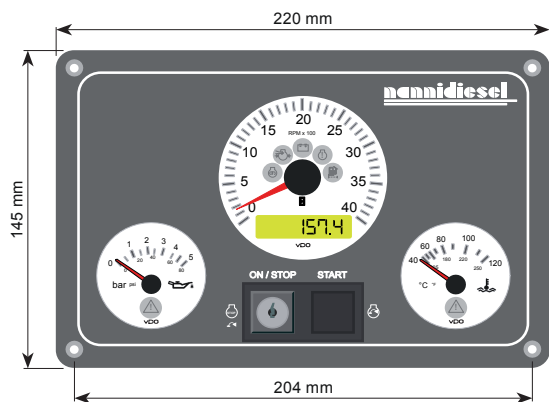

## Nanni Industries S.A.S. France

11, Avenue Mariotte-Zone Industrielle

BP 107- 33260 La Teste France

Tel : + 33 (0)5 56 22 30 60

Fax : +33 (0)5 56 22 30 79

www.nannidiesel.com

Certified ISO by



Your dealer